

Magnetic Sensor IC

Unipolar Detection High Performance Low Power Hall-Effect Sensor IC

**AS1810A**

● General Description

Using low power CMOS process, the AS1810A is designed for low power, high performance unipolar detection hall-effect application, such as cover switch, contactless switch, solid state switch and lid close sensor etc battery operation. The hall IC integrated an on-chip hall voltage generator for magnetic sensing, a comparator that amplifiers the hall voltage, a Chopper amplifier, a Schmitt trigger to provide switching hysteresis for noise rejection, and a complementary output.

The total power consumption of AS1810A is typically less than 1uA at 1.8V power supply. AS1810A is designed to respond to alternating South pole. When the magnetic flux density (B) is larger than operate point (B_{OPS}), the output will be turned on (low), the output is held until the magnetic flux density (B) is lower than release point (B_{RPS}), then turn off (high).

The device is available in DFN1216-4L Package and is rated over the -40°C to 85°C . The package is RoHS and Green compliant.


● Features

- Input Voltage Range : 1.65V to 5.0V
- Micro-power consumption ideal for battery power applications
- Uniplar Operation, easy to use as output
- Very high sensitivity hall sensor
- Low Power CMOS process technology
- Chopper stabilization amplifier stage
- Magnetic Sensitivity (typical)
 $B_{OPS}=40\text{Gauss}$, $B_{RPS}=23\text{Gauss}$
- Good RF noise immunity
- No need pull-up resistor
- Small Solution Size
- RoHS & Green Compliant
- DFN1216-4L Package
- -40°C to $+85^{\circ}\text{C}$ Temperature Range

● Applications

- Cover switch in clam-shell cellular phones
- Cover switch in Notebook, PC/PAD
- Contact-less switch in consumer products
- Solid State Switch
- Handheld Wireless Handset Awake Switch
- Lid close sensor for battery-powered devise
- Magnet proximity sensor for reed switch replacement in low duty cycle applications
- DV, DSC, and White Goods


■ **Ordering Information**

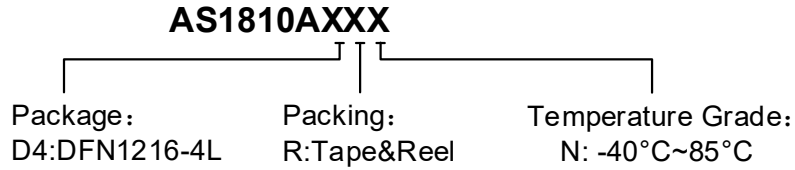

Part Number	B _{OPS} (Gauss)	B _{RPS} Gauss)	Package Type	Package Qty	Temperature	Eco Plan	Lead
AS1810AD4RN	40	23	DFN1216-4L	7-in reel 3000pcs/reel	-40~85°C	Green	Cu

■ **Marking & Pin Assignment**

DFN1216-4L

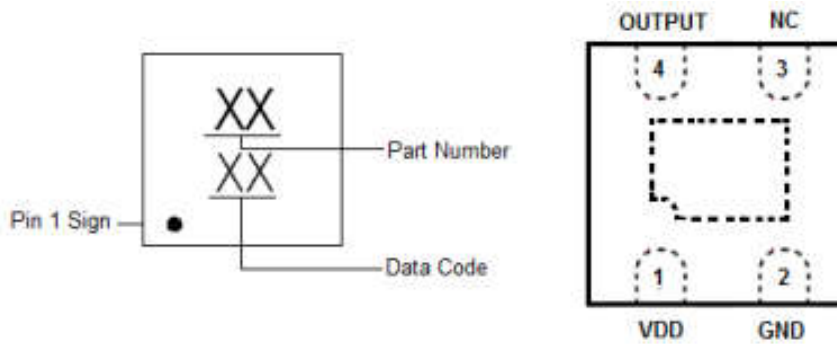

Pin Name	Pin No.	I/O	Pin Function
	DFN1216-4L		
VDD	1	P	Input Power Supply
GND	2	P	Ground
NC	3	-	Not Connected
OUTPUT	4	O	Output Pin

■ **Typical Application Circuit**



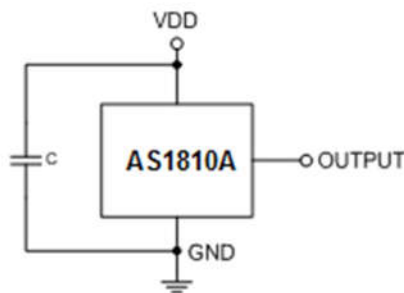


Figure 1, Typical Application Circuit of AS1810A

■ **Tape and Reel Information**

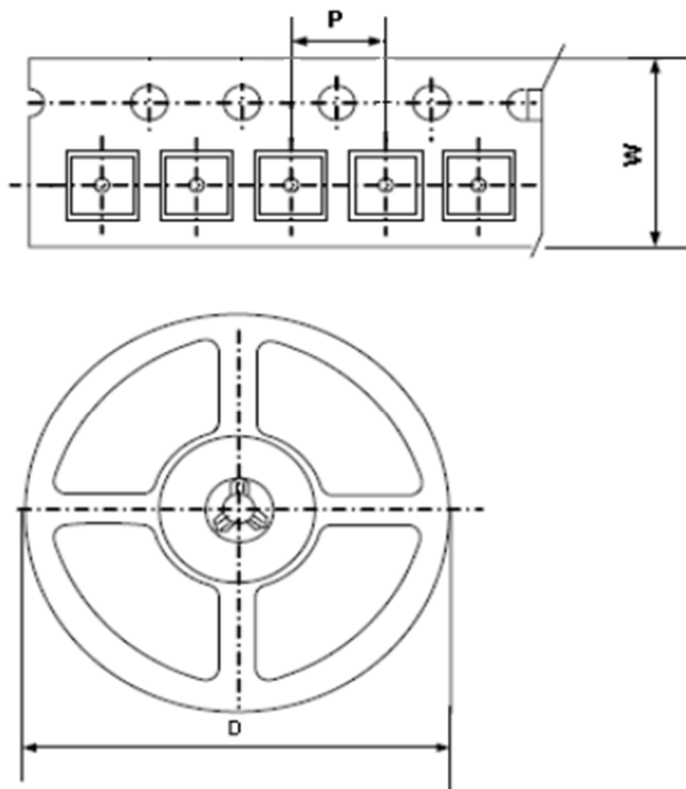

QUADRANT ASSIGNMENTS FOR PIN 1 ORIENTATION IN TAPE

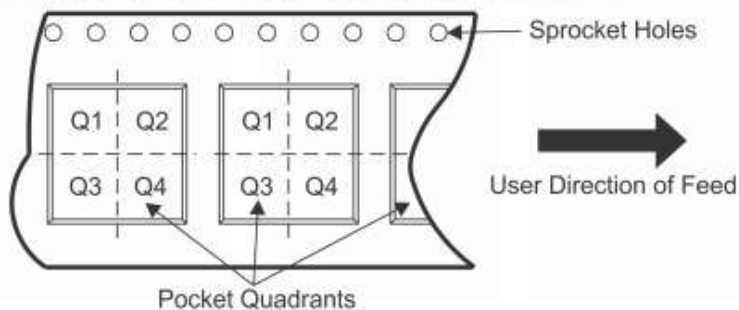

Package Type	Carrier Width(W)	Pitch(P)	Reel Size(D)	Packing Minimum	Pin 1 Quadrant
DFN1216-4L	8.0±0.1 mm	4.0±0.1 mm	180±1 mm	3000pcs	Q2

*All dimensions are nominal